

Self-Adhesive SBS Membrane

DESCRIPTION

Self-Adhesive membrane **SELDAN IPE** is a self-adhesive bituminous waterproofing sheet with non-protected surface.

Composed of self-adhesive SBS polymer bitumen with an upper surface finish of a high-density polyethylene film (HDPE) and a lower surface finish of siliconized release film.

It conforms to the requirement of BS 8102.

ADVANTAGES

- Watertight - resistance to hydrostatic head of water.
- Crack Bridging properties due to high compound elongation - allows membrane to accommodate movements in the building structure.
- Excellent mechanical properties in all directions (tear strength and tensile strength, puncture and impact resistance) due to the high density polyethylene film (HDPE) finish.
- Elastic behaviour (good memory and recovery).
- Elastomeric and self-healing, minor perforation will automatically heal.
- Cold applied, easy and fast application, no torch is necessary.
- Total flexibility of the material to apply at complex geometries & perfect accommodation to the support.
- Excellent adhesion to the primed support.
- Controlled thickness during factory production ensuring constant error-free site application.
- High durability of the waterproofing due to the SBS elastomer compound of the membrane.
- High chemical, oxidation & microbiological resistance.

USES

SELDAN IPE is use for the waterproofing and damp proofing of underground walls, basement raft, tunnels, substructures and inverted roofs under tiles.

PROPERTIES

Properties	Value	Standard
Thickness	1.5 ± 0.1 mm	-----
Hydrostatic Pressure Resistance	≥4 bar (40m) No Leakage	BS EN 12390 (Part 8)
Tensile Strength, Longitudinal	≥1.3 N/mm ²	ASTM D5147 / ASTM D882
Tensile Strength, Transversal	≥1.2 N/mm ²	ASTM D5147 / ASTM D882
Elongation at Break, Longitudinal	≥300 %	ASTM D5147 / ASTM D882
Elongation at Break, Transversal	≥300 %	ASTM D5147 / ASTM D882
Tear Strength, Longitudinal	≥100 N	ASTM D5147
Tear Strength, Transversal	≥80 N	ASTM D5147
Heat Resistance	70°C (No Flow)	ASTM D5147
Low Temperature Flexibility	≤ -10 °C (No Cracks)	ASTM D1970
Puncture Resistance	100 N	ASTM E154
Lap Joint Strength	≥1.8 N/mm	ASTM D1000
Water Absorption @ 24 Hours	≤0.30 % by Weight	ASTM D570
Water Vapor Transmission	≤0.50 g/m ² /24 hrs.	ASTM E96
Softening Point of Coating Compound	≥100 °C	ASTM D36

APPLICATION INSTRUCTIONS

SURFACE PREPARATION

The surface receiving waterproofing treatment shall be dry with moisture content <4% and thoroughly cleaned to remove dirt, dust, grease, oil, foreign substances etc., using appropriate tools and methods.

It is recommended to prime the surface using a bituminous primer **TIKI PRIME S @ 4 to 6 m²/ltr.**, prior to installation of membrane.

Primer should be dry before the application of the membrane. Drying time depends on ambient temperature and humidity.

APPLICATION

The membrane is bonded completely to the primed surface by peeling-off the release film from the membrane bottom and pressing it against the surface using suitable roller.

Side overlap of at least 75mm and end overlap of at least 100 mm should be maintained properly at the time of application, the overlap sealed by pressing it against the surface using suitable roller.

IMPORTANT RECOMMENDATIONS

SELFDAN IPE membrane should not be applied when temperature is below +10°C.

The membrane after application should not be left exposed to sun for extended period to prevent U.V. rays damage.


On vertical surface, the membrane after installation should be protected immediately after application, with HDPE dimple boards **DANODREN**.

On horizontal surface, the membrane after installation should be protected immediately with 50mm cement-sand screed.

SUPPLY

SELFDAN IPE is supplied in standard roll size of 1m x 20m.

Presentation	Value	Unit
Length	20	m
Width	1	m
Roll Surface	20	m ²

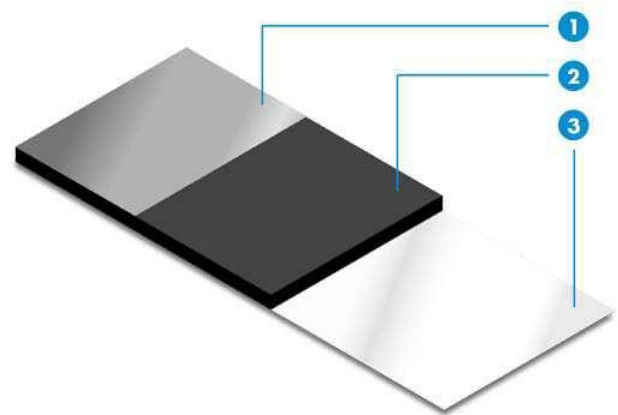

- (1) HDPE flexible film
- (2) Elastomeric SBS Polymer Modified Bitumen
- (3) Releasable Siliconized film

STORAGE

Store in a dry place under the covered shed and protected from rain, sun, heat, U.V rays and low temperatures. It must be stored upright.

VERSION: R2, 202203

Disclaimer: The technical information, and, in particular, the recommendations relating to the application and end-use of Tiki Tar Danosa (TIKIDAN) products, are given in good faith based on TIKIDAN's current knowledge and experience of the products when properly stored, handled and applied under normal conditions in accordance with TIKIDAN's recommendations. The information herein is of a general nature and no assumption can be made as to a product's suitability for a particular use or application and no warranty in respect of merchantability or of fitness for a particular purpose can be inferred from this information. The user alone is fully responsible for the product's suitability for the intended application and purpose. TIKIDAN reserves the right to change the properties of its products.

Note: Field service where provided does not constitute supervisory responsibility. Suggestions made by TIKIDAN either orally or in writing may be followed, modified or rejected by the owner, engineer or contractor since they, and not TIKIDAN, are responsible for carrying out procedures appropriate to a specific application. TIKIDAN reserves the right to amend the composition of its material and consequently their prices, without prior notice. For this reason, all orders will be accepted only in accordance with the conditions and technical specifications in force at the date of order. Users must always refer to the most recent issue of the local Product Data Sheet for the product concerned, copies of which will be supplied on request.

TIKITAR DANOSA (INDIA) PRIVATE LIMITED

Tiki Tar Estate, Village Road, Bhandup (W), Mumbai - 400 078,
Maharashtra, India. T: +91 22 4126 6699
E: info@tikidan.in | W: www.tikidan.in