


PRESENTATION

PRESENTATION	VALUE	UNIT
Length	20	m
Width	1	m
Roll surface	20	m ²
Rolls per pallet	25	rolls
Product Code	192200	-

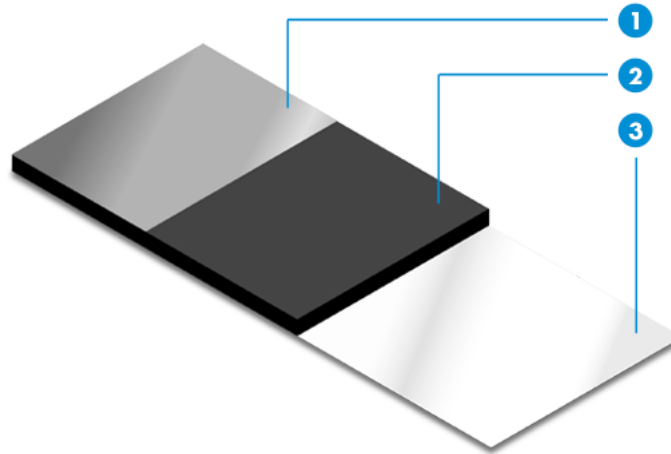

1. polyethylene film
2. SBS modified bitumen
3. self-adhesive polyethylene film

INDICATIONS AND IMPORTANT RECOMMENDATIONS

- Self-Adhesive membrane Self-Dan PE should not be applied with temperature below + 10 °C.

MAINTENANCE RECOMMENDATIONS

Maintenance requirements for Danosa Roofing Products

The following maintenance checks must be adhered to:

- A general examination on the condition of the waterproofing and surrounding roof components.
- An inspection of all functional roofing elements including skylights, outlets, upstands, penetrations and any other visible roofing components.
- Clean outlets, drains, gutters and remove any debris from the roof.
- Periodic removal of mildew, moss, herbs or any other kind of vegetation that has been accumulation on the waterproofing.
- Periodic removal of possible sediments accumulated on the deck (silt, sledges, slate granules, etc) by occasional water accumulation.
- Periodic removal of debris and small objects that may have accumulated on the roof.
- Ensure surrounding structural elements are sound such as eaves, flashings, slate tiles and brickwork.
- Ensure that the waterproofing is in good condition and there are no blisters, damage or separation.
- Review the condition of the waterproofing (adherence to upstands, condition of overlaps, visual appearance, etc) and repair the defects observed.

These operations must be carried out twice a year, preferably at the beginning of spring or autumn and must be increased in case of decks or valleys with zero falls. It is also necessary to perform additional maintenance depending on the type of roof, location and proximity of roofs to areas with trees or in areas with high levels of pollution.

More details on the document Maintenance and repair recommendations for flat roofs waterproofed with modified bitumen sheets

WARNING

The information that appears in the following document makes reference to the uses and utilities of danosa's products and systems, and it is based on the knowledge that have been learnt until present, by Danosa. This is only possible if products have been stored and used in an appropriate way.

Nevertheless, Danosa is not responsible for unsuitable uses of the products neither any other facts, such as meteorological facts. So Danosa is just responsible for the quality related to the provided products.
Danosa reserves the right to carry out modifications without previous notice.

The values that appear in the technical sheet are the results of the tests that have been performed in our laboratory. December 2010.

Web site: www.danosa.com E-mail: export@danosa.com Phone number: +34 949 888 210