

SELF-DAN PLUS PROWRAP

Cold Applied Flexible Self-Adhesive Wrapping Tape

DESCRIPTION

SELF-DAN PLUS PROWRAP is a cold applied flexible self-adhesive Wrapping Tape designed to provide protection to below ground pipelines, insulated piping and equipment against corrosion and electrolysis, vapor ingress and moisture build-up and condensation.

Composed of a self-adhesive protective coating with high strength flexible film backing, the tape is suitable for coating small to large diameter bare pipes / insulated pipes, bends, tees, equipment etc. It has a lower surface finish of releasable polyethylene film.

SELF-DAN PLUS PROWRAP Conforms to AWWA C209.

ADVANTAGES

- Controlled thickness in factory ensuring constant non-variable site application
- Easy and fast Application
- Application at room temperature
- Excellent adhesion to self and various substrates
- Excellent conformability to pipes and pipe sections
- Total flexibility of the material, and perfect accommodation to the support
- Excellent mechanical properties in both directions
- Provides maximum resistance to water or vapor transmission
- Provides self-sealing properties that provides an excellent bond at the overlap
- Minimizes energy loss by keeping insulation dry and free of condensation
- Protects substrate from deterioration from exposure to below ground acids and alkalis found in normal soils
- Provides improved resistance to hydrocarbon contaminated soils
- Elastomeric properties allow for movement of the substrate

USES

Product used for the protection of underground and non-exposed insulated / non-insulated concrete and metallic pipelines, equipment and substrates from detrimental effects of corrosion and electrolysis, vapours and moisture condensation in areas such as,

- Water supply pipelines
- Fire hydrant supply pipelines
- Oil and gas pipelines
- Coal log supply pipelines
- Chemical supply pipelines
- Sewage pipelines
- Waste water disposal pipelines
- Coarse particles (ores and minerals) conveying pipelines
- Mineral waste transport and disposal pipelines
- Electric supply cables carrying pipelines
- Telecommunication cables carrying pipelines

APPLICATION INSTRUCTIONS

SURFACE PREPARATION

- The external surface of insulated / non-insulated pipe shall be thoroughly cleaned to remove rust, dirt, dust, moisture, grease, oil, mill scale, welding splatter, slivers, scabs, foreign substances etc., using appropriate tools & methods.
- Presence of moisture on pipe, if any shall be removed by warming the pipe surface using gas torch or hot air blower.
- It is recommended to prime the non-insulated pipe/equipment surface using a primer **TIKI PRIME S @** 6 to 8 m²/ltr., prior to installation of tape.
- Primer should be dry before the application of the tape. Drying time depends of the temperature and humidity.
- For wrapping and protection insulated pipelines, priming is not required.

APPLICATION

- **SELF-DAN PLUS PROWRAP** Tape is wrapped around the pipe / insulated pipe in spiral / cigarette method and bonded completely by releasing the film and pressing it against the surface.
- Overlap of least 50mm should be maintain properly at the time of application.
- Leave pipes untreated 150mm to 200mm from ends on either side to facilitate welding.

PROPERTIES


Properties	Value	Standard
Total Thickness	1.5 mm	-
Tensile strength	220 ± 80 N/5cm	UNE-EN 12311-1
Elongation at break	≥ 300 %	UNE-EN 12311-1
Resistance to static loading (B Method)	≥ 20 Kg.	UNE-EN 12730
Puncture resistance	275 ± 50 N	ASTM E154
Resistance to impact (flexible: EPS)	≥ 900 mm	UNE-EN 12691
Tear resistance	23 ± 5 N	ASTM D1004
Joint strength: shear resistance	220 ± 80	UNE-EN 12317-1
Flexibility at low temperature	< -15 °C	UNE-EN 1109
Watertightness (60 kPa)	Pass	UNE-EN 1928
Bond strength (to concrete)	≥ 0.5 N/mm ²	UNE-EN 13596
Peel strength	1600 ± 200 N/m	ASTM D903
Crack bridging ability (5 mm, 10,000 cycles)	-10 °C	UNE-EN 14224
Microbiological resistance (30 weeks)	Pass	UNE-EN 14225
Dimensional stability at elevated temperature	< 0.5 %	UNE-EN 1107-1
Humidity resistance factor	115000	UNE-EN 1931
Humidity flow density coefficient	2.56x 10 ⁻⁹ Kg (m ² .s)	UNE-EN 1931
Dielectric strength (in air, 25 °C Cl. N° 12.1.1)	9.6 kV/mm	ASTM D149-09
Volume resistivity (500 V dc – 60 s Cl. N° 12.2)	6.3 x 10 ¹⁴ Ohm.cm	ASTM D257-14

STORAGE

ADDITIONAL PROPERTIES

Properties	Value	Standard
Flow resistance at elevated temperature	>70 °C	UN-EN 1110
Dimensional stability at elevated temperature (longitudinal)	<0.5 %	UNE-EN 1107-1
Dimensional stability at elevated temperature (transversal)	<0.5%	UNE-EN 1107-1

PRESENTATION

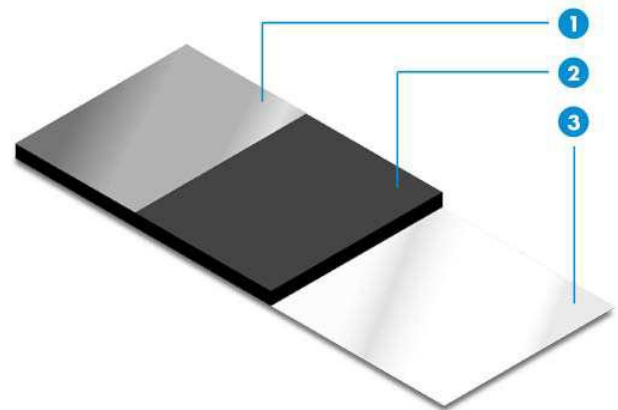

- (1) High Strength Flexible Film Backing
- (2) Protective Coating
- (3) Releasable Polyethylene film

IMPORTANT RECOMMENDATIONS

- **SELF-DAN PLUS PROWRAP** tape should not be applied when temperature is below +10°C
- Must be stored in a dry place protected from rain, sun, heat and cold temperatures.
- **SELF-DAN PLUS PROWRAP** tape after application should not be left exposed to sun for extended period to prevent from U.V. rays damage.

SUPPLY

SELF-DAN PLUS PROWRAP tapes are supplied in 20 meter length and in required widths from 50 mm to 1000 mm in multiples of 50 mm.

This product is not-toxic and non-flammable. It must be stored dry and protected from rain, sun, heat and low temperatures. It must be stored upright.

VERSION: R5, 202203

Disclaimer: The technical information, and, in particular, the recommendations relating to the application and end-use of Tiki Tar Danosa (TIKIDAN) products, are given in good faith based on TIKIDAN's current knowledge and experience of the products when properly stored, handled and applied under normal conditions in accordance with TIKIDAN's recommendations. The information herein is of a general nature and no assumption can be made as to a product's suitability for a particular use or application and no warranty in respect of merchantability or of fitness for a particular purpose can be inferred from this information. The user alone is fully responsible for the product's suitability for the intended application and purpose. TIKIDAN reserves the right to change the properties of its products.

Note: Field service where provided does not constitute supervisory responsibility. Suggestions made by TIKIDAN either orally or in writing may be followed, modified or rejected by the owner, engineer or contractor since they, and not TIKIDAN, are responsible for carrying out procedures appropriate to a specific application. TIKIDAN reserves the right to amend the composition of its material and consequently their prices, without prior notice. For this reason, all orders will be accepted only in accordance with the conditions and technical specifications in force at the date of order. Users must always refer to the most recent issue of the local Product Data Sheet for the product concerned, copies of which will be supplied on request.

TIKITAR DANOSA (INDIA) PRIVATE LIMITED

Tiki Tar Estate, Village Road, Bhandup (W), Mumbai - 400 078,
Maharashtra, India. T: +91 22 4126 6699
E: info@tikidan.in | W: www.tikidan.in



ISO 9001:2015