

## POLYDAN 48 P PARKING

POLYDAN 48 P PARKING is a bituminous waterproofing sheet of 4,8 kg/m<sup>2</sup>, LBM (SBS)-48-FP type. Composed of a non-woven great heavyweight polyester felt reinforcement and covered on both sides with SBS modified bitumen mastic. Membrane with an upper surface geotextile finished and a lower surface in polyethylene film. Tested according to standard EN test methods.



### CE MARKING



Identification number of the Certification Body: 1035

DERIVADOS ASFALTICOS NORMALIZADOS S.A.  
Calle La Granja 3 (28108 - Alcobendas, MADRID)

Year in which the CE marking was affixed: 2010  
Certificate number CPF: 1035-CPD-ES044104  
European standard UNE-EN 13707 and UNE-EN 13969 (A) and (T)

Produced at: Polígono Industrial Sector 9 (19290 - FONTANAR, Guadalajara)

Membrane of 1 m x 8 m x 4,8 kg/m<sup>2</sup> composed of SBS modified bitumen with non-woven great heavyweight polyester felt.

Membrane with an upper surface finish of geotextile and a lower surface finish of polyethylene film. Torch-on application. Recommended as cap sheet in a bi-layer system under heavy protection, waterproofing layer in a single-layer system under heavy protection, and waterproofing layer (bi-layer or single-layer system) for sealing of buried structures. Not recommended as cap sheet in a bi-layer self-protected system, waterproofing layer in a single-layer self-protected system and cap sheet in green roofs.

TECHNICAL DATA	VALUE	UNIT	STANDARD
External fire performance	PND	-	UNE-EN 1187; UNE-EN 13501-5
Reaction to fire	E	-	UNE-EN 11925-2; UNE-EN 13501-1
Watertightness	Pasa	-	UNE-EN 1928
Longitudinal tensile strength	1000 ± 250	N/5cm	UNE-EN 12311-1
Transversal tensile strength	800 ± 250	N/5cm	UNE-EN 12311-1
Longitudinal elongation at break	45 ± 15	%	UNE-EN 12311-1
Transversal elongation at break	45 ± 15	%	UNE-EN 12311-1
Resistance to root penetration	No Pasa	-	UNE-EN 13948
Resistance to static loading	>25	kg	UNE-EN 12730
Resistance to impact	>2000	mm	UNE-EN 12691
Longitudinal resistance to tearing (nail shank)	500 ± 100	N	UNE-EN 12310-1
Transversal resistance to tearing (nail shank)	500 ± 100	N	UNE-EN 12310-1
Joint strength: peel resistance	PND	-	UNE-EN 12316-1
Joint strength: shear resistance	650 ± 250	-	UNE-EN 12317-1
Flexibility at low temperature	< -15	°C	UNE-EN 1109
Humidity resistance factor	20.000	-	UNE-EN 1931
Dangerous substances	PND	-	-
Flexibility at low temperature (pliability) after aging	-5 ± 5	°C	UNE-EN 1109
Flow resistance at elevated temperature after aging	100 ± 10	°C	UN-EN 1110

Pasa = Positive or correct No pasa = Negative PND = No performance determined - = Not necessary

### ADDITIONAL TECHNICAL DATA

ADDITIONAL DATA	VALUE	UNIT	STANDARD
Mass per unit area (nominal)	4.8	kg/m <sup>2</sup>	-
Mass per unit area (minimum)	4,56	kg/m <sup>2</sup>	-
Nominal thickness	4.0	mm	-
Flow resistance at elevated temperature	> 100	°C	UN-EN 1110
Dimensional stability at elevated temperature (longitudinal)	< 0.5	%	UNE-EN 1107-1
Dimensional stability at elevated temperature (transversal)	< 0.5	%	UNE-EN 1107-1
Adhesion of granules	PND	%	UNE-EN 12039

Membranes thickness tolerance: = -0,3 mm, apart from membranes with thickness 2 and 2,4 mm whose tolerance is = -0,2 mm.  
 Membranes mass per unit area tolerance: -5% (mini) and + 10% (maxi) from nominal value.

### DECLARATION OF CONFORMITY



DERIVADOS ASFÁLTICOS NORMALIZADOS S.A.  
 Calle La Granja 3 (28108 - Alcobendas, MADRID)

Membrane of 1 m x 8 m x 4,8 kg/m<sup>2</sup> composed of SBS modified bitumen with non-woven great heavyweight polyester felt. Membrane with an upper surface finish of geotextile and a lower surface finish of polyethylene film. Torch-on application. Recommended as cap sheet in a bi-layer system under heavy protection, waterproofing layer in a single-layer system under heavy protection, and waterproofing layer (bi-layer or single-layer system) for sealing of buried structures. Not recommended as cap sheet in a bi-layer self-protected system, waterproofing layer in a single-layer self-protected system and cap sheet in green roofs.

This product is according to the Z.A. Annex of the UNE-EN 13707 and UNE-EN 13969  
 The roll must be stored upright and protected against atmospheric conditions and dampness. The Application cannot be done under temperatures lower than -5 °C.

Certificate number CPF: 1035-CPD-ES044104

José Antonio Manzarbeitia Valle  
 Manager Quality and R&D Manager.  
 Fontanar, March 01st 2010


### STANDARDS AND CERTIFICATION



UNE EN 13707 standard.  
 UNE EN 13969 standard.  
 CE marking.  
 DIT 567/11 "ESTERDAN – SELF DAN – POLYDAN ESTRUCTURAS ENTERRADAS".  
 DIT 569/11 "POLYDAN TRAFICO RODADO".

PRESENTATION

PRESENTATION	VALUE	UNIT
Length	8	m
Width	1	m
Roll surface	8	
Rolls per pallet	23	
Product Code	141151	-

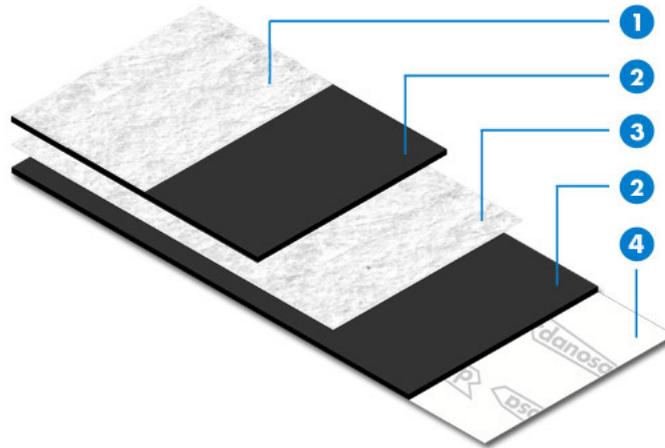

1. geotextil
2. SBS modified bitumen
3. non-woven polyester felt
4. polyethylene film

WARNING

The information that appears in the following document makes reference to the uses and utilities of danosa's products and systems, and it is based on the knowledge that have been learnt until present, by Danosa. This is only possible if products have been stored and used in an appropriate way.

Nevertheless, Danosa is not responsible for unsuitable uses of the products neither any other facts, such as meteorological facts. So Danosa is just responsible for the quality related to the provided products.

Danosa reserves the right to carry out modifications without previous notice.

The values that appear in the technical sheet are the results of the tests that have been performed in our laboratory. October 2011.

Web site: [www.danosa.com](http://www.danosa.com) E-mail: [export@danosa.com](mailto:export@danosa.com) Phone number: +34 949 888 210